

m o o o i

Heracleum III Linear

BERTJAN POT | POWERED THROUGH ELECTROSANDWICH® BY MARCEL WANDERS




Heracleum III Linear, a Moooi Original, by Bertjan Pot combines elegance and function. Its long frame and upward-sweeping blossoms make it ideal for dining tables or kitchen islands. Powered with Electrosandwich® by Marcel Wanders Studio, it creates a warm glow with bright LEDs. Available in four colours and compatible with the Wireless Wall Switch.

Detailing



The Heracleum III Linear is a design not possible with normal wires. It's powered by Electrosandwich, a technique of coating conductive layers.

Colours




Green



Copper




Nickel



White

Heracleum III Linear / Linear

Dimensions

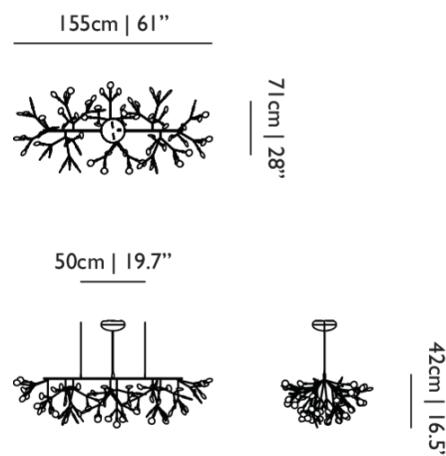

Product

WIDTH 155cm | 61"
HEIGHT 42cm | 16.5"
DEPTH 71cm | 28"
WEIGHT NETTO 6.5kg | 14.33lbs

Packaging

WIDTH 85cm | 33.5"
HEIGHT 55cm | 21.7"
CUBAGE 0.92m³ | 32.36ft³
LENGTH 196cm | 77.2"
WEIGHT 13kg | 28.66lbs

Technical CE / UL

MATERIAL

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

72

INPUT VOLTAGE

120-250V

FREQUENCY

50/60

MAX POWER CONSUMPTION

22W

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble III in matching color, Pebble III Copper Coated, ABS, Pebble III Nickel Coated, ABS, Pebble III White Coated, ABS

CHROM X

0.46

COLOUR TEMPERATURE

2600 K (max)

CHROM Y

0.4

LIGHT DIRECTION

All directions

CRI

91

LIGHT OUTPUT

1872 lm

DIMMING & LIGHTING CONTROL

Wireless Wall Switch (dimmer), Smart Home Integration (Zigbee), DALI dt6, Mains / ELV dimming is not possible, Smart Home Integration (Matter)

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

DALI dt6

The luminaire is dimmable by integrating it into a DALI network. This is an universal and professional standard in home automation systems with endless control possibilities and ease. We advise to hire a professional to integrate the luminaire into your DALI network.

Compatible models: Linear CCC, Linear CE, Linear UL

Wireless Wall Switch (dimmer)

With our Wireless Wall Switch, you'll have full control over your Moooi lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooi lighting design. The Wall Switch can also be integrated in existing System 55 (i.e. Gira and Jung) or Decora style wall switches. Once the radio device is installed you will also have the possibility to control your light fixture with the Casambi App available in the Google Play and Apple app store. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: Linear CCC, Linear CE, Linear UL

Smart Home Integration (Zigbee)

By adding a Zigbee converter this light fixture can seamlessly integrate into a Zigbee 3.0-based smart home network, such as Philips Hue, Amazon Alexa, Google Home, Ikea Tradfri and Homey. This integration allows for wireless control and compatibility with other smart home systems, without the need to change your home's wiring. To enable this, simply add a Zigbee converter to your luminaire. We recommend the Sunricher Zigbee to Dali Converter for its reliability and compatibility with the US 110 voltage or the Osram 4062172044776 Zigbee 3.0 DALI Converter LI for 210-220V Please note that this converter is sold by third-party vendors and not directly by Moooi and this should be installed by a professional electrician.

Compatible models: Linear CE, Linear UL

Mains / ELV dimming is not possible

Mains and/or ELV dimming is not possible. The wireless wall switch is advised for dimming in this case.

Compatible models: Linear CE, Linear UL

Smart Home Integration (Matter)

Using the Matter Dali Bridge / Converter this Light can seamlessly integrate in your Matter Smart Home system

like Apple Home, Google Home, Home Assistant, Amazon Alexa, Samsung SmartThings and Homey. We recommend the M2D Bridge Converter for its reliability and compatibility. Please note that this converter is sold by third-party vendors and not directly by Moooi and this should be installed by a professional electrician.

Compatible models: Linear CE, Linear UL
