

FLAMINGO

Bernhard Osann

Interazione manuale e flessibilità sono i cardini di Flamingo: la distribuzione variabile del peso e il baricentro centrale consentono alla struttura di bilanciarsi autonomamente, garantendo stabilità e libertà di movimento senza attrito. La sorgente luminosa regolabile offre un'illuminazione funzionale o decorativa.



2700K

LAMPING

Source	LED UGR linear
Total power	18W
Switching	dimnable on board
Tension	220/240V
Color temperature led	2700K
Luminous flux led	1800lm
Typ CRI	90
Ip class	20
Dimensions	140x140x10cm
Materials	aluminium+brass+stone
Notes	Cable length 1,6m, red RAL3002, black RAL9005


Codes

FLM LNN 21
FLM LRR 21
FLM LLH 21

Structure

Black / Stone
Red / Stone
Chrome / Stone

Certificazioni

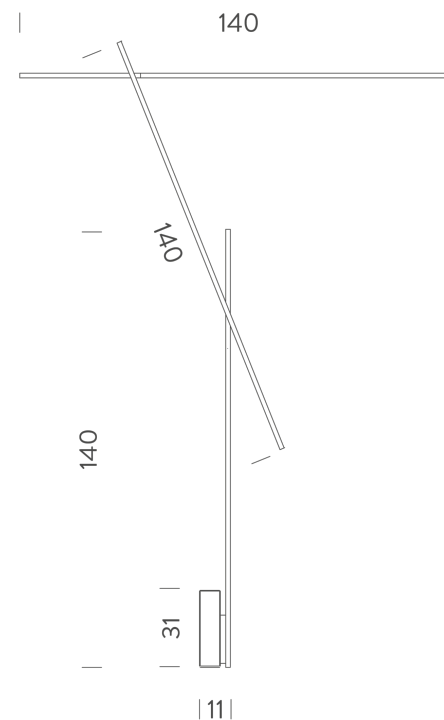

3000K

LAMPING

Source	LED UGR linear
Total power	18W
Switching	dimnable on board
Tension	220/240V
Color temperature led	3000K
Luminous flux led	1800lm
Typ CRI	90
Dimensions	140x140x10cm
Materials	aluminium+brass+stone
Notes	Cable length 1,6m,red RAL3002, black RAL9005

Codes

FLM LNN 22

FLM LRR 22

FLM LLH 22

Certificazioni



Structure

Black / Stone

Red / Stone

Chrome / Stone

