


IK02 IP44

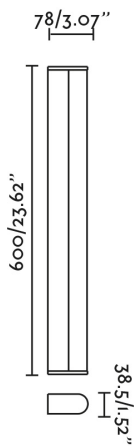

Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	44
IK	02
Power (W)	9
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h L90 B10
Power factor	0.8
Luminous Flux (lm)	1049
Color temperature (K)	3000K
Opening angle degrees	360
Light orientation	Direct
Photobiological risk	0
CRI	≥80
Control System	On/off
Supply current	350 mA
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Chrome
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

